



Tipycal GRMS Coonection

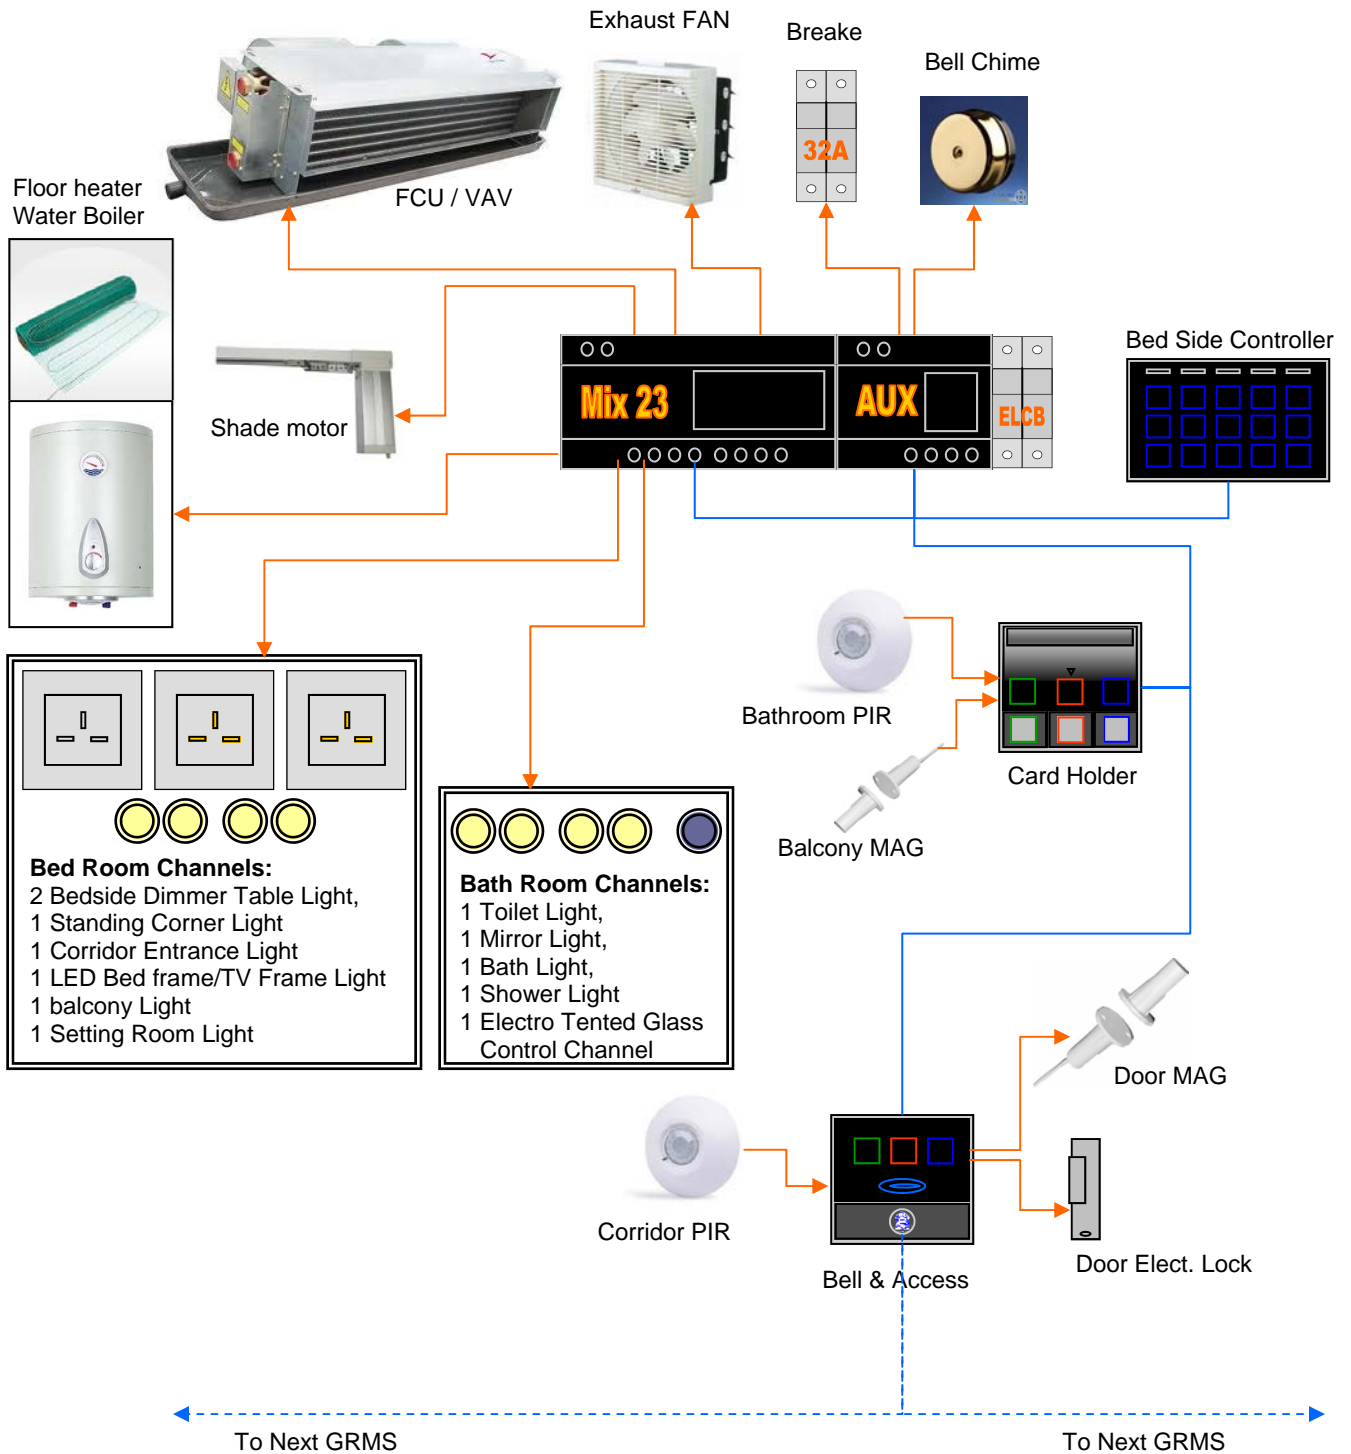


Multi-Room Networking

Example 1

Assuming That Each Room Has Typical 6 Devices: as below and Adding 1 DDP or 4 Button switch. This Means in a single Subnet we can have up to 42 Rooms without any need for Adding

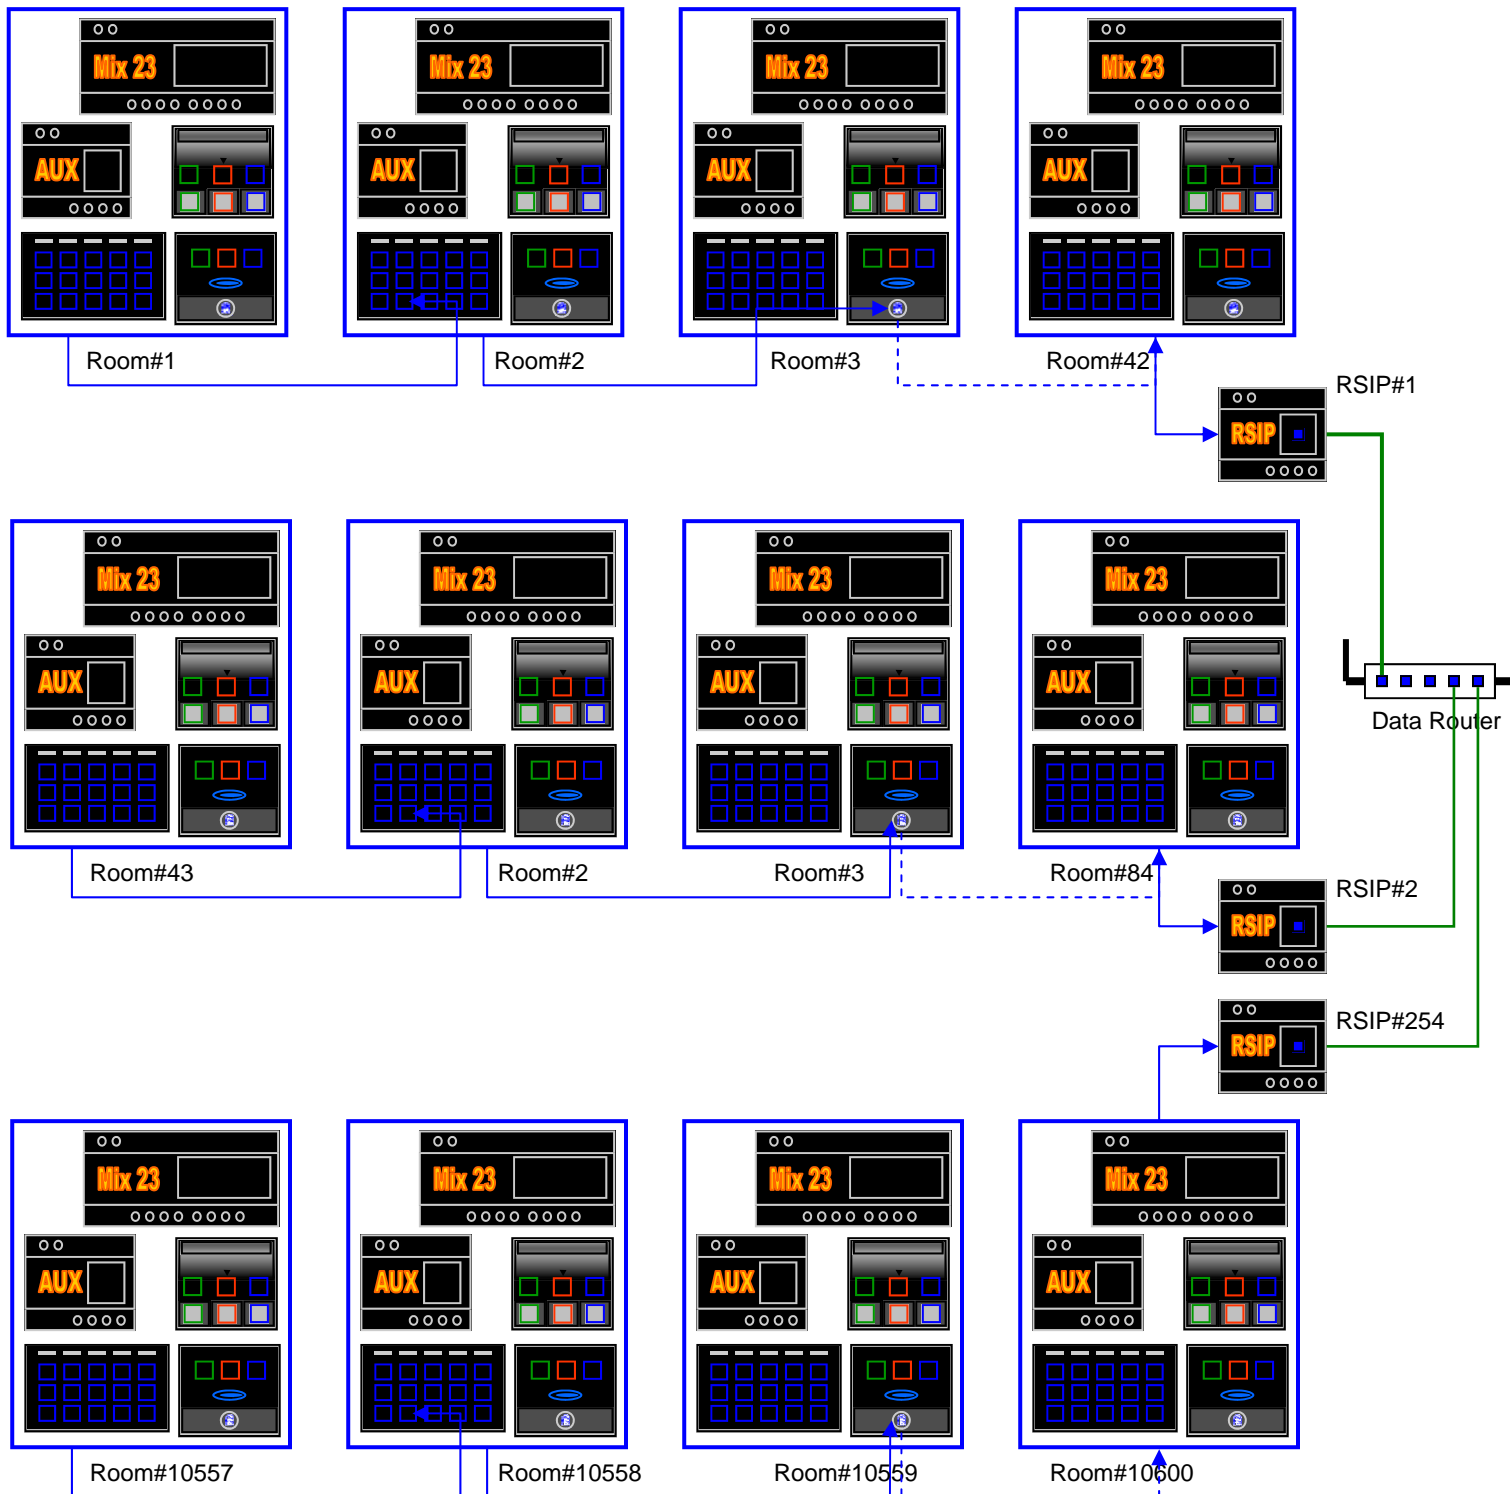

Smart-Hotel Environment

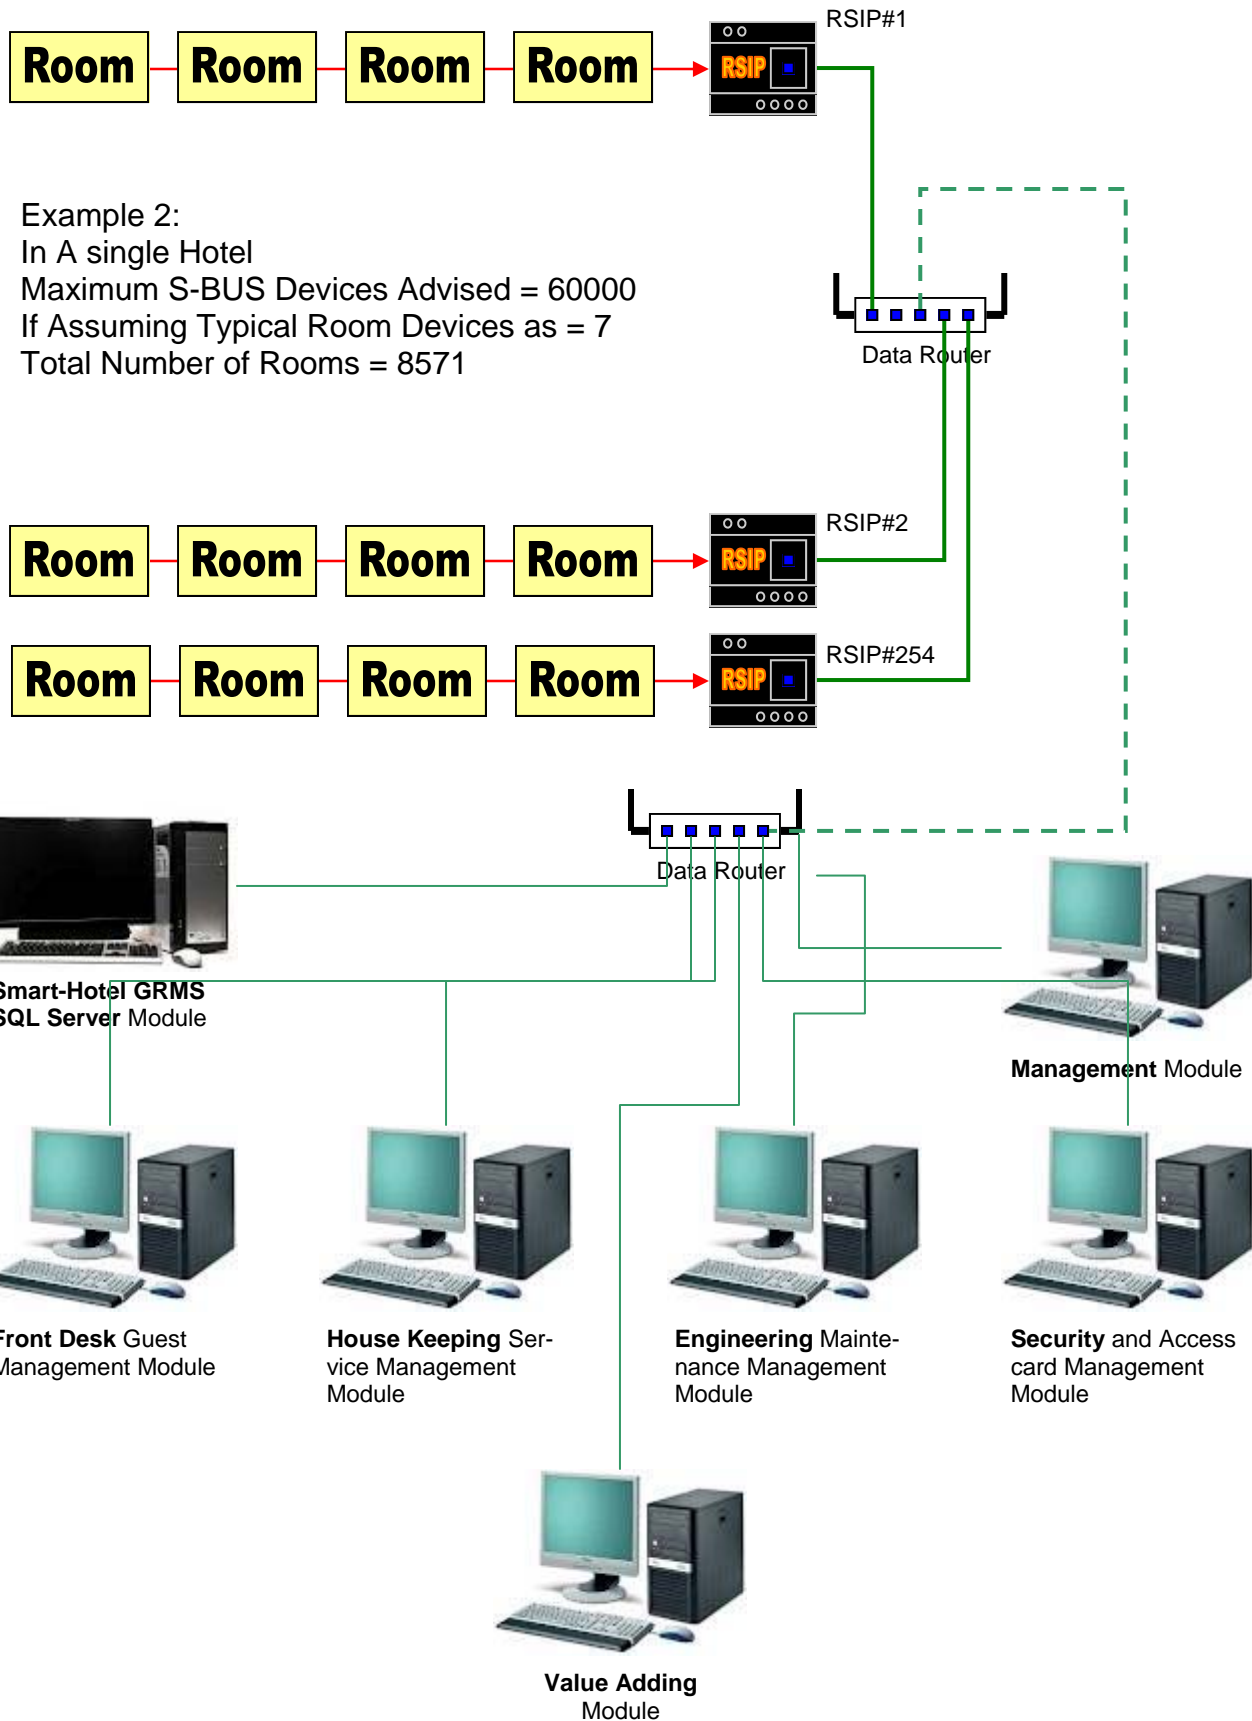

Example 2:
 In A single Hotel
 Maximum S-BUS Devices Advised = 60000
 If Assuming Typical Room Devices as = 7
 Total Number of Rooms = 8571

Simplest Service Panel

Example 3

Several hotels has their Own Card Access system (Hotel Locking) but need only to enhance the Service System. Also They Have their Own Design for Brass or other Elegant or artistic Shapes that fit their Hotel classical or Contemporary look and need. Thus all they require from Smart-G4 is to have a Main card Holder with Service that can be used direct with their Designer Made Panels. Smart-industry Made this Possible via Both On-Line and Offline system Solutions. See Below diagram Example.

