



DIN-Rail Mount Switched Pass Through Relay 6ch 16A /per ch. with scene controller Multi Phase, Multi-Current, Multi voltage. Software Selectable programmable Motor function: Double Throw Dipole Grouping. Work 220/110 VAC, 50-60Hz as well as 1.5-48VDC (Green operated supplied by 24VAC/12mA) Small and elegant with easy labeling space, output status LED indicator, network health, broadcast address button and Momentary channel button. Can be used in any location that require energy saving, intelligent control such as apartment, Villa, Offices, Restaurant, Hotels or factories. \*Can be Manually Programmed by any Electrician on site without need for PC.

\*\* (This is an Advanced 2-way module. Changing load status manually reflect and update on all Connected SW & Devices)

## technical data



### Supply

80-240VAC, 50/60Hz 1-3Phase and Pass through 1.5-48VDC. power consumption: 20-30mA

### Outputs

6 x Isolated & Separated Switched Pass through outputs rated at 16A each output ch.

### Maximum Total Load

96A total load of all channels

### Control IO

3 x Advanced RS485 S-BUS serial port links (both train & screw link types)

### Upgrade IO

1 x mini USB port (to connect to special programming board)

### User Controls

- front panel override switches, Includes ON/OFF/AUTO override switch for each channel
- LED status indicator/channel
- Diagnostic LED+ BROADCAST

### Programming

- Manual Ch. Pairing Programming Each Channel to a Button on Wall Panels (e.g. DDP, 6B)
- Advanced Software Configuration & Programming

### Compliance

CE Mark Low Voltage  
CE Mark EMC  
ROHS, CPT, SABS

### Internal Protection

- Over Load Protection
- Protecting Delay 0-60min
- Startup Delay 0-25 Sec.
- BUS Rv. Polarity Protection
- BUS Short Circuit Protection

### Preset and Scenes

6X12 Built in Scenes, and 6X2 Sequence Modes and Logics.

### Installation

- 35mm DIN-Rail Mount Ready
- Wall Mount Ready (8P)

### SBUS DC Supply

24VDC with flexible tolerance between 12-36VDC. Flexible ability to add power supply as to be needed any where

### Supply Terminals

6 each is good for 2 x 2.5mm<sup>2</sup> or 1 x 4mm<sup>2</sup> max conductor size

### Output Terminals

6 each is good for 2 x 2.5mm<sup>2</sup> or 1 x 4mm<sup>2</sup> max conductor size

### Operating Environment

0° to 45°C ambient temperature  
10% to 93% RH

### Enclosure & Size

Polycarbonate, DIN-rail (8 Unit)

### Dimensions & Weight

W 91mm x L 145mm x H 75mm  
Packed weight 0.6 kg

### New added features as Simultaneous operation:

- a- Multi Phase
- b- Multi Current
- c- Multi Voltage
- d- Double Throw
- e- momentary
- f- Latching / toggling
- g- Scene from multi Units



## load compatibility



- All Types of Lighting
- Water Heaters & Appliances
- Water Pumps & Solenoids
- Track lighting
- Sirens, Flashers++



commercial




GTIN (UPC-EAN): 0610696253903  
Patent P. No: 201110123081.0




0 610696 253903

electrical diagram **G4**

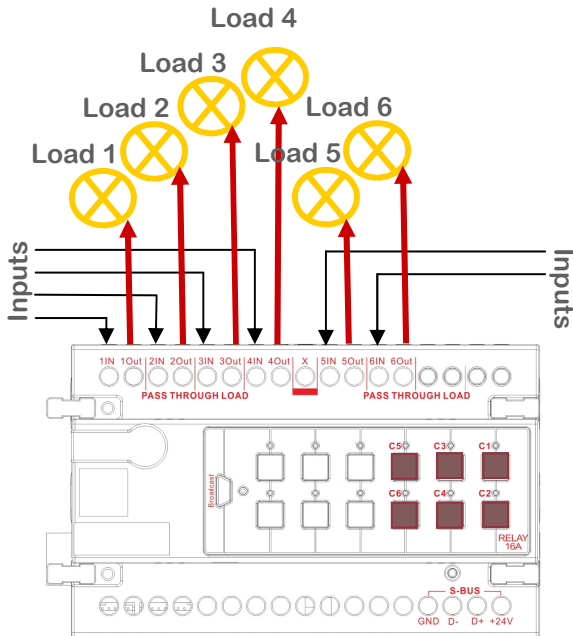


\*Loads Inputs Can be from Different Phases and different Voltage or frequency. Accept ELV: 80-240VAC, and ELC: 1.5-48VDC

mounting dimensions **G4**

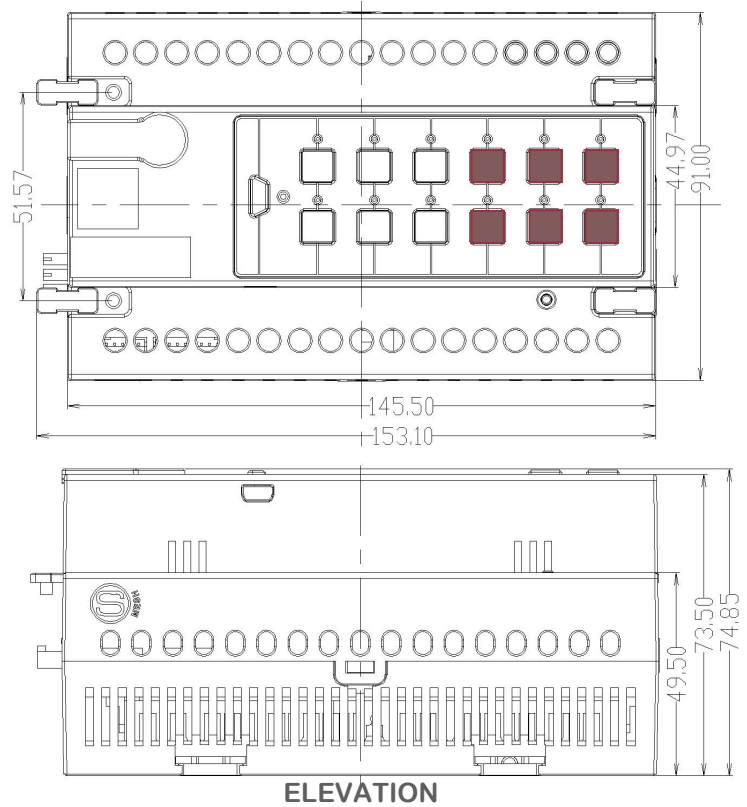


Warning: this is an electrical product, it must be installed only by trained & licensed electrician


S-BUS connection **G4**

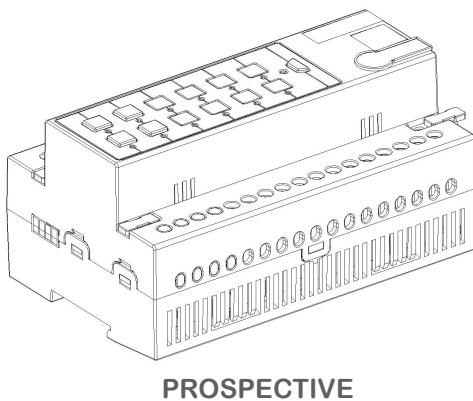

PROSPECTIVE

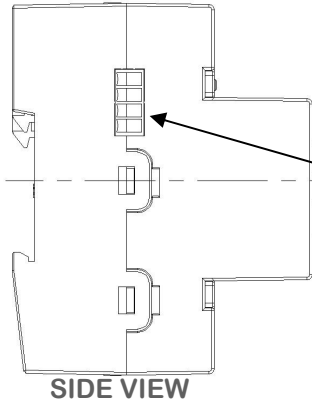

SIDE VIEW

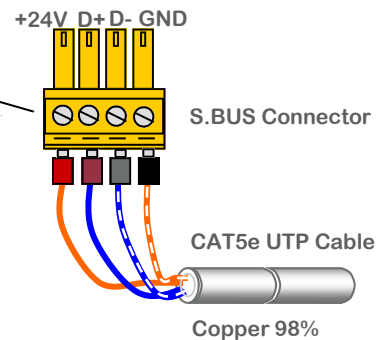

www.smarthomebus.com • info@smarthomebus.com  
USA - Germany - Denmark - Hong Kong - Jordan - China - UAE

SB-G4 Data Sheet Rev 2.0 released Dec.2012

Specifications subject to change without notice. © Smarthome® -Group Trading as Smart-BUS®. Texas 77043 - USA. All rights reserved. Smart Mesh®, Smarthome BUS® and all other associated logos are the registered trademarks of Smart-Group®. Not to be used nor reproduced without written permission. All Patents and IPO's Remain owned by



UTP core colors **G4**

S.BUS +24V	orange
S.BUS GND	w/orange
S.BUS D+	blue
S.BUS D-	w/blue
Spare	green
Spare	w/green
Spare +12v	brown
Spare -12V	W/brown